




**Modek Nudek / Widedek 760 mm cover Polycarbonate translucent roof sheeting:**

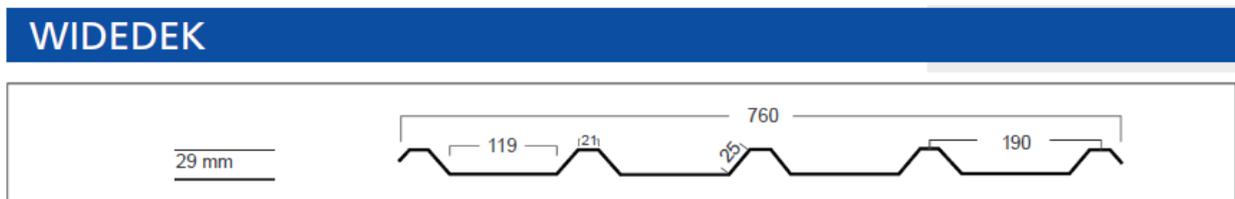

**Sheeting profile:**

Where required to introduce natural light, **Nudek / Widedek 760 mm cover** can be used if the pitch of the roof is more than 5 degrees. **Nudek / Widedek 760 mm cover** is available as a 1 mm and 1.2 mm thickness

**Material and finish for Modek Nudek/Widedek 760 mm Polycarbonate roof sheeting:**

**ALL Modek translucent roof sheeting is manufactured as UV2**

- Clear
- Opal 50
- Bronze (minimum quantities required)
- Heat Stop silver (minimum quantities required)
- Charcoal on special request and minimum quantities
- Diffuser (min order quantities apply)



**Office:** CRS Sheeting CC - Cape Town

Unit 2, 12 Fifth Street, Montague Gardens, 7441

**Tel:** 021 551 2599 | **Email:** carl@cape-roof-sheeting.co.za | **Site:** www.cape-roof-sheeting.co.za

**Members:** C Bayhack, C Meilech

Reg No: 2005/001894/23 | Vat No.: 4350260347

### **Fixings for Modek Nudek / Widedek 760 mm Polycarbonate sheeting:**

A bonded washer with a minimum diameter of at least 20 mm must be used.

### **Safety;**

Extra care should be taken when installing Modek Polycarbonate sheeting on the roof due to the fact that polycarbonate is not of “walk on” nature. An installation board should be used to spread the weight of the installer evenly

### **Installation:**

Fixings should be used through every crown at the top end of the sheet. Thereafter a fixing must be used through every second narrow crown at each purlin all the way down to the final end lap, where a fixing is applied again through every crown.

**NB! Pre drilling** of the holes is imperative before the permanent fixing is done. The pre drilling should be at least 2 mm bigger than the diameter of the shaft of the fixing screws.

The purpose of pre drilling is to avoid excessive expansion and contraction of Polycarbonate sheeting.

Each end lap should lap at least 300 mm onto the other sheet.

Care must be taken to not over tighten the fixing screw i.e. the crown should not show indentation after the screw is fixed.

As is the case with any sheet installation, the lap end must face away from the prevailing wind

### **Handling and storage:**

The Modek Polycarbonate sheeting is wrapped before it is delivered to site. Upon receipt, inspection should be carried out to ensure that no damages are present.

Sheets must not be pulled from the pile from one end and sliding along the length of the tack. This will cause scratching. Rather strip the sheet required in a roll action from one side to the other.

The covering of the sheeting should only be removed when installation is going to take place. This will avoid construction dust and debris settling in and on the sheets

### **Protrusion through sheeted surfaces:**

Absolutely no protrusion through polycarbonate sheeting



**Office: CRS Sheeting CC - Cape Town**

Unit 2, 12 Fifth Street, Montague Gardens, 7441

**Tel:** 021 551 2599 | **Email:** carl@cape-roof-sheeting.co.za | **Site:** www.cape-roof-sheeting.co.za

**Members:** C Bayhack, C Meilech

Reg No: 2005/001894/23 | Vat No.: 4350260347

## **Quality Assurance**

The manufacturer shall be assessed and certified as complying with ISO 9001:2015

Quality Assurance

## **Cleaning of polycarbonate roof sheeting;**

The roof sheeting must be washed down every six months with very mild soap detergent and water to remove any surrounding manufacturing and atmospheric residue

## **Sealing and side stitching:**

Absolutely no other product other than butyl tape must be used when sealing is carried out on the end laps. It is recommended that a double strip of butyl is applied at each end lap

## **Purlin Spacing:**

If a continuous run installation is made, i.e. polycarbonate sheets sided by side all along the roof, purlin spacing should not be more than 1,5 m.

If polycarbonate is fitted with a steel sheet neighbouring each side all along the building, then the purlin spacing can be 1,8 m

During side cladding it is recommended that purlin spacing should not be more than one meter.

Side stitching screws can be applied 300 mm along the side of the sheets to avoid wind vibrations.

We nevertheless refer you to the below



**Office: CRS Sheeting CC - Cape Town**

Unit 2, 12 Fifth Street, Montague Gardens, 7441

**Tel:** 021 551 2599 | **Email:** carl@cape-roof-sheeting.co.za | **Site:** www.cape-roof-sheeting.co.za

**Members:** C Bayhack, C Meilech

Reg No: 2005/001894/23 | Vat No.: 4350260347

**Guide to maximum support centres  
Single Skin (GRP 1.8kg/m<sup>2</sup> " PC 1.25mm) roofing**

| Profile depth | Chequerboard | Continuous run |
|---------------|--------------|----------------|
| 18 - 25mm     | 1200mm       | 900mm          |
| 26 - 30mm     | 1500mm       | 1000mm         |
| 31 - 55mm     | 1800mm       | 1500mm         |

**Bill descriptions:**

Area required to be covered with Modek polycarbonate sheeting should be expressed in square metre or total linear metre.

**Warranty:**

**All Modek industrial gauges i.e. 1 mm and 1.2 mm carries a warranty of ten years**



**Office: CRS Sheeting CC - Cape Town**

Unit 2, 12 Fifth Street, Montague Gardens, 7441

**Tel:** 021 551 2599 | **Email:** carl@cape-roof-sheeting.co.za | **Site:** www.cape-roof-sheeting.co.za

**Members:** C Bayhack, C Meilech

Reg No: 2005/001894/23 | Vat No.: 4350260347